

ANCHOR SHACKLES



Anchor Shackles

Maritime International's safety bolt anchor shackles are suitable for all fendering applications. The large bow allows multiple chains to be attached to one shackle when necessary. The shackles can be supplied in a wide range of sizes. Shackles are supplied with a hot dip galvanized finish. The strength of these shackles exceeds most chain strengths of comparable size.

Shackles are forged, quenched and tempered with alloy safety bolt-type pins.

Finish will be hot dip galvanized.

Cotter pins are stainless steel.

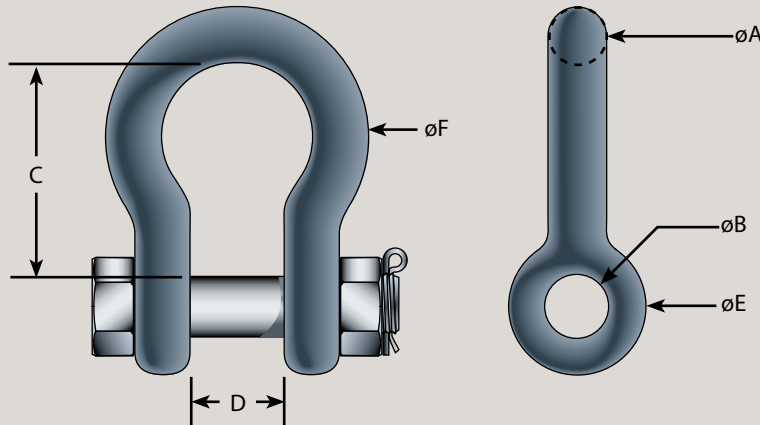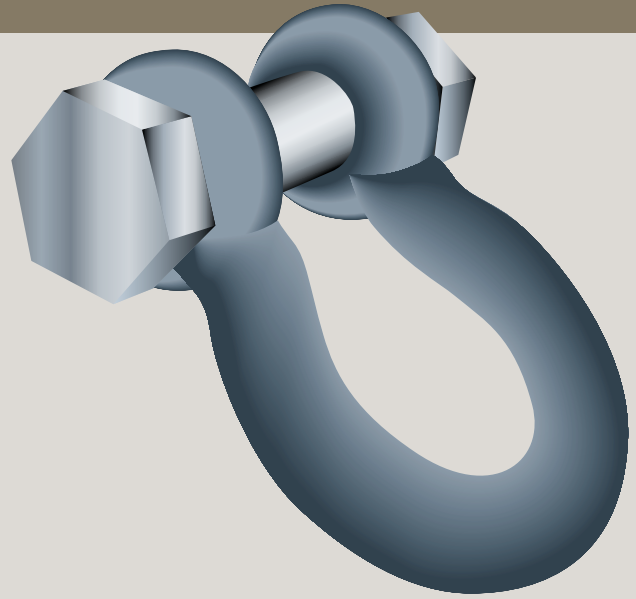

ANCHOR SHACKLE SPECIFICATIONS								dimensions in inches
Nominal Size	Breaking Strength (Kips)	A	B	C	D	E	F	
1/4	6.62	1/4	5/16	1 1/8	1/2	3/4	3/4	
5/16	9.92	5/16	3/8	1 1/4	9/16	7/8	1	
3/8	13.2	3/8	7/16	1 7/16	11/16	1	1 1/8	
7/16	19.8	7/16	1/2	1 11/16	3/4	1 1/8	1 1/4	
1/2	26.5	1/2	5/8	1 7/8	13/16	1 3/16	1 5/16	
5/8	43.0	5/8	3/4	2 7/16	1 1/16	1 9/16	1 11/16	
3/4	62.8	3/4	7/8	3	1 1/4	1 7/8	2	
7/8	86.0	7/8	1	3 5/16	1 7/16	2 1/8	2 1/4	
1	112	1	1 1/8	3 3/4	1 11/16	2 3/8	2 5/8	
1 1/8	126	1 1/8	1 1/4	4 1/4	1 7/8	2 5/8	3	
1 1/4	159	1 1/4	1 3/8	4 1/2	2	2 15/16	3 3/8	
1 3/8	179	1 3/8	1 1/2	5 1/4	2 1/4	3 5/16	3 5/8	
1 1/2	225	1 1/2	1 5/8	5 3/4	2 3/8	3 5/8	3 7/8	
1 3/4	331	1 3/4	2	7	2 7/8	4 5/16	5	
2	463	2	2 1/4	7 3/4	3 1/4	5	5 3/4	
2 1/2	728	2 1/2	2 3/4	10	4 1/8	6	7 1/4	
3	1125	3	3 1/4	13	5	6 3/4	9	
3 1/2	1588	3 1/2	3 3/4	15	5 3/4	8 1/2	10 1/8	
4	1985	4	4 1/4	17	6 1/2	9 3/8	10 1/2	

Above strengths and proof loads are for standard shackles. A higher strength alloy grade shackle is available.